


H 35HA Vibrator Head

Item Number: 0610059

H 35HA

Economical concrete consolidation for every need

>> The electrically driven HMS system is extremely versatile. These high frequency flex-shaft internal vibrators can be adapted to every type of application. Heads and shafts can be easily combined and rapidly exchanged to match the right equipment to the job. Unique hybrid heads offer optimum concrete consolidation and movement. Wacker Neuson HMS systems provide reliable performance and quality concrete. <<

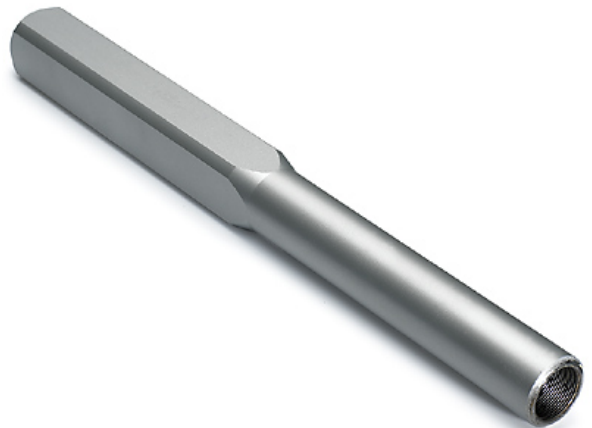

Additional Advantages

- The exclusive shape of the high amplitude hybrid heads provides excellent consolidation and movement of concrete.
- Quick and easy flex-shaft replacement with the quick disconnect coupling. Shafts and vibrator heads can be arranged in many desired combinations.

Description	Metric	Imperial
Diameter	35 mm	1.4 in
Overall length	405 mm	15.9 in
Weight	2.0 kg	4.4 lb
Shipping weight (including packaging)	2.0 kg	4.4 lb
Type of flexible shaft	SM-S	

Standard Package - H 35HA

Please refer to our Price List and Ordering Guide for complete accessory information.

Specifications may change due to continuous product development. Users are advised to consult Wacker Neuson's Operator's Manual and website for specific information regarding the engine power rating. Actual power output may vary due to conditions of specific use.

Generated on Wednesday, April 6, 2011

